
HADLEY PRODUCTS INSTALLATION INSTRUCTIONS FOR CHECK VALVE

Using this check valve will provide an additional seal to maintain air tank pressure.

CAUTION: DO NOT MOUNT CHECK VALVE IN COMPRESSOR HEAD, OR UNIT WILL NOT OPERATE PROPERLY.

INSTRUCTIONS

- 1. Disconnect compressor air line from tank assembly.
- 2. Remove brass fitting #H12553 from current location.
- 3. Install brass check valve provided. Add pipe scalant to threads if check valve was not supplied with it.
- 4. Re-connect airline to check valve.

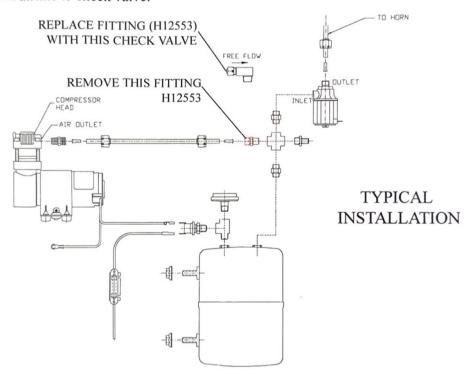

If you should have any questions about this installation, please contact the service department at Hadley Products. Service Direct Line (616)-249-8462

Hadley Products

2851 Prairie S.W. Suite D Grandville, MI 49418 Main: (616) 530-1717

Fax: (616) 530-3283

padleu

www.hadley-products.com

Page 1 Rev: A/99 Filename: 15452.p65